



IPv6 associated protocols



New Protocols

- New features specified in IPv6 Protocol (RFC 2460 DS)
- Neighbor Discovery (ND) (RFC 2461 DS)
- Auto-configuration :
 - Stateless Address Auto-configuration (RFC 2462 DS)
 - DHCPv6: Dynamic Host Configuration Protocol for IPv6 (RFC 3315 PS)
 - Path MTU discovery (pMTU) (RFC 1981 PS)



New Protocols (2)

- MLD (Multicast Listener Discovery) (RFC 2710 PS)
 - Multicast group management over an IPv6 link
 - Based on IGMPv2
 - MLDv2 (equivalent to IGMPv3 in IPv4)
- ICMPv6 (RFC 2463 DS) "Super" Protocol that :
 - Covers ICMP (v4) features (Error control, Administration, ...)
 - Transports ND messages
 - Transports MLD messages (Queries, Reports, ...)



Neighbor Discovery

- IPv6 nodes which share the same physical medium (link) use Neighbor Discovery (NDP) to:
 - discover their mutual presence
 - determine link-layer addresses of their neighbors
 - find routers
 - maintain neighbors' reachability information (NUD)
 - not directly applicable to NBMA (Non Broadcast Multi Access) networks → ND uses multicast for certain services.




Neighbor Discovery (2)

- Protocol features:
 - Router discovery
 - Prefix(es) discovery
 - Parameters discovery (link MTU, Max Hop Limit, ...)
 - Address auto-configuration
 - Address resolution
 - Next Hop determination
 - Neighbor Unreachability Detection
 - Duplicate Address Detection
 - Redirect



Neighbor Discovery (3): Comparison with IPv4

- It is the synthesis of:
 - ARP
 - R-Disc
 - ICMP redirect
 - ...

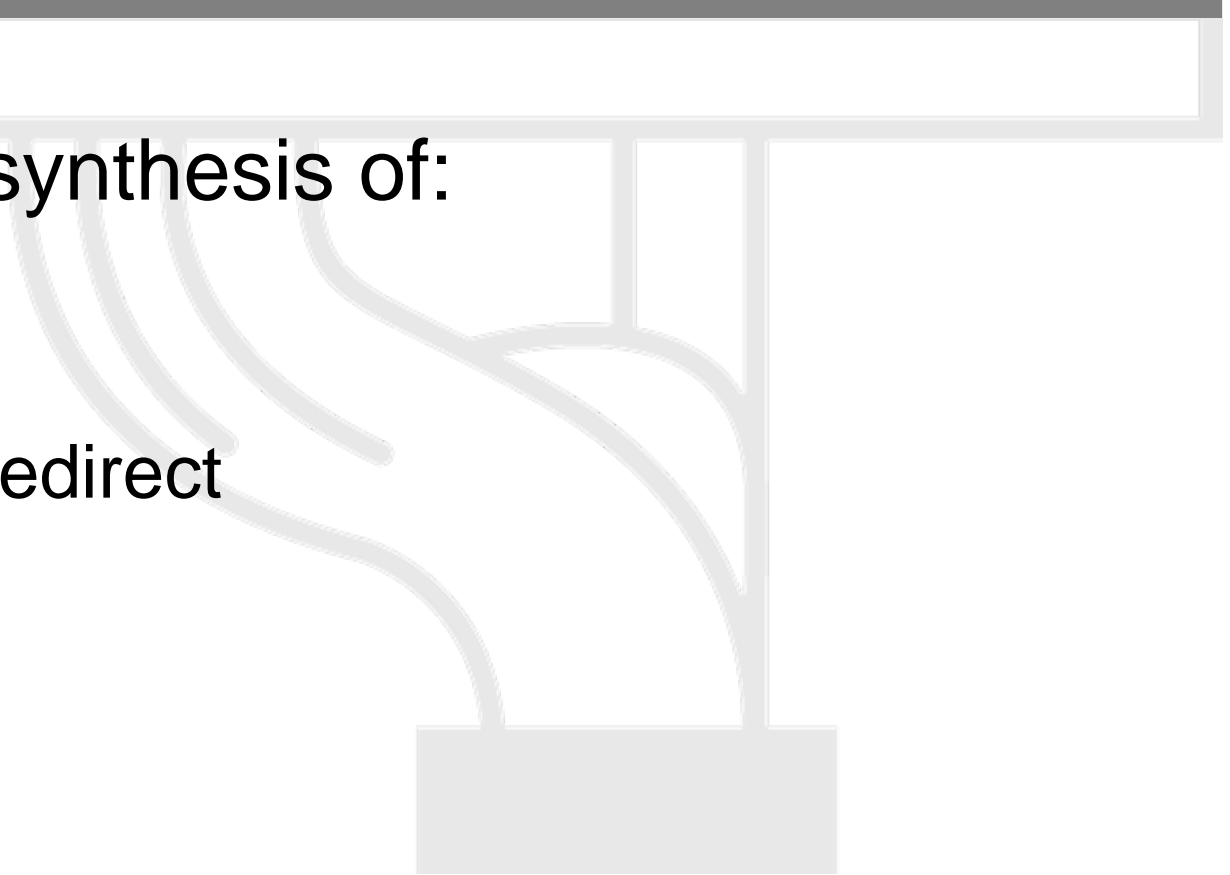

Neighbor Discovery (4)

- ND specifies 5 types of ICMP packets :
 - **Router Advertisement (RA) :**
 - periodic advertisement (of the availability of a router) which contains:
 - » list of prefixes used on the link (autoconf)
 - » a possible value for Max Hop Limit (TTL of IPv4)
 - » value of MTU
 - **Router Solicitation (RS) :**
 - the host needs RA immediately (at boot time)



Neighbor Discovery (5)

- **Neighbor Solicitation (NS):**
 - to determine the link-layer @ of a neighbor
 - or to check its impeachability
 - also used to detect duplicate addresses (DAD)
- **Neighbor Advertisement (NA):**
 - answer to a NS packet
 - to advertise the change of physical address
- **Redirect :**
 - Used by a router to inform a host of a better route to a given destination



Address Resolution

- Find the mapping: **Dst IP @ → Link-Layer (MAC) @**
- Recalling IPv4 & ARP
 - ARP Request is broadcasted
 - e.g. ethernet @: FF-FF-FF-FF-FF-FF
 - Btw, it contains the Src's LL @
 - ARP Reply is sent in unicast to the Src
 - It contains the Dst's LL @



Address Resolution (2)


IPv6 with Neighbor Discovery

At boot time, every IPv6 node has to join 2 special multicast groups for each network interface:

- All-nodes multicast group: ff02::1
- Solicited-node multicast group: ff02:1:ffxx:xxxx (derived from the lower 24 bits of the node's address)

H1: IP1, MAC1

H2: IP2, MAC2

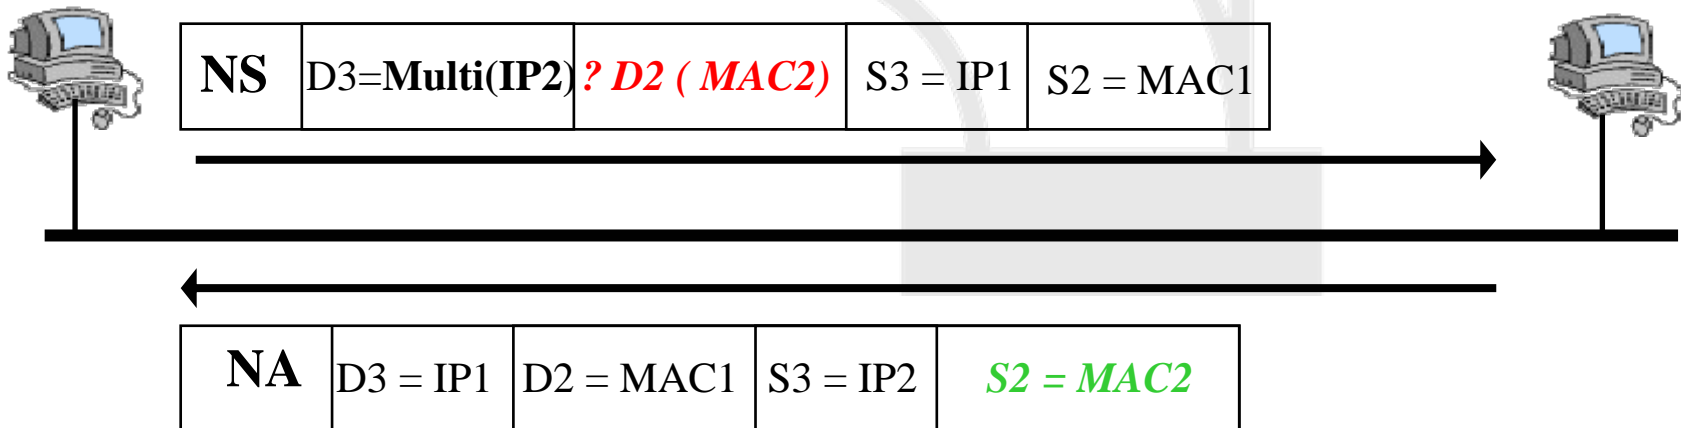

Address Resolution (3)

Solicited Multicast Address

- **Concatenation** of the prefix FF02: : 1: FF00: 0/104 with the last 24 bits of the IPv6 address

Example:

- **Dst IPv6 @:** 2001: 0660: 010a: 4002: 4421: 21FF: FE24: 87c1



- **Sol. Mcast @:** FF02: 0000: 0000: 0000: 0000: 0001: FF24: 87c1



- **ethernet:** 33-33-FF-24-87-c1



Path MTU discovery (RFC 1981)

- Derived from RFC 1191, (IPv4 version of the protocol)
- **Path** : set of links followed by an IPv6 packet between source and destination
- **link MTU** : maximum packet length (bytes) that can be transmitted on a given link without fragmentation
- **Path MTU** (or pMTU) = $\min \{ \text{link MTUs} \}$ for a given path
- Path MTU Discovery = automatic pMTU discovery for a given path



Path MTU discovery (2)

- Protocol operation
 - makes assumption that pMTU = link MTU to reach a neighbor (first hop)
 - if there is an intermediate router such that link MTU < pMTU → it sends an ICMPv6 message: "Packet size Too Large"
 - source reduces pMTU by using information found in the ICMPv6 message
- => Intermediate network element aren't allowed to perform packet fragmentation

