



# IPv6 Multicast



# Intro

- Multicast is inherent to the IPv6 protocol
- No broadcasts
  - Multicast used instead
- But some parts need to be configured
  - for building the multicast trees
  - for topology information (routing)





# IPv6 multicast

Multicast addressing

MLD & MLDv2

PIM SM/SSM

Interdomain multicast



# Multicast addressing

- **Multicast addresses format: (RFC 3513)**

8 bits		4 bits	4 bits	112 bits
1111	1111	flags	scope	group ID
F	F			

- 8 high order bits set to 1 → Addresses derived from FF00::/8 prefix
- **flag** field(4 bits) :
  - ORPT values
    - T = 0 for permanent addresses (Defined by IANA)
    - T = 1 for transient addresses
    - Bits P and R discussed later
- **scope** field → Makes it possible to limit the scope of the multicasting
  - 0 - Reserved
  - 1 – Node-local
  - 2 – Link-local
  - 3 – Subnet-local
  - 4 - Admin-local
  - 5 - Site-local
  - 8 - Organization-local
  - E - Global (Internet)



# Multicast addressing

- Scopes must be configured on routers!
- Examples of IANA allocated addresses
  - Flag bits T=P=R=0
    - Flag = 0
  - Group ID 101 → NTP servers
    - **FF01:0:0:0:0:0:0:101** : All the NTP servers on the sender's host
    - **FF02:0:0:0:0:0:0:101** : All the NTP servers on the sender's link
    - **FF05:0:0:0:0:0:0:101** : All the NTP servers on the sender's site
    - **FF0E:0:0:0:0:0:0:101** : All the NTP servers on the Internet



# Reserved multicast addresses: examples (RFC 2375)

- Addresses available only for a given scope
  - FF02:0:0:0:0:0:0:1 : All the nodes of the link
  - FF02 :0:0:0:0:0:0: 2 : All the routers of the link
  - FF05 :0:0:0:0:0:0: 2 : All the routers of the site
  - FF02 :0:0:0:0:0:0: D : All the PIM routers of the link
  - ...
- Addresses available for all scopes
  - FF0X :0:0:0:0:0:0: 101 : Network Time Protocol (NTP)
  - FF0X :0:0:0:0:0:0: 109 : MTP Multicast Transport Protocol
  - ...



# IPv6 multicast and Ethernet

- Ethernet is multicast capable (not always implemented)
- Requires 8th bit of MAC address to be set to 1
- For IPv6 : @MAC = 33-33-xx-yy-zz-kk
- xx-yy-zz-kk are 32 lower bits of the IPv6 address
- Example:
  - IPv6 @ = **FF3E:40:2001:660:3007:123:1234:5678**
  - MAC @ = **33-33-12-34-56-78**



# Solicited node multicast addresses (for NDP)

- Multicast address built from unicast address
- Concatenation of
  - FF02::1:FF00:0/104
  - 24 low order bits of the unicast address
- Nodes build their own IPv6 solicited node multicast address
- Nodes that know the IPv6 address of a host but not its MAC address can use the solicited node multicast address
  - NDP protocol (Neighbor Discovery Protocol)
  - Protocol for DAD management
- Avoids sending MAC broadcasts (FF-FF-FF-FF-FF-FF)
- Example:

2001:0660:010a:4002:4421:21FF:FE24:87c1

FF02:0000:0000:0000:0000:0001:FF00:0000/104

FF02:0000:0000:0000:0000:0001:FF24:87c1

33-33-FF-24-87-C1 -> MULTICAST MAC ADDRESS





# Multicast addresses derived from unicast prefixes (RFC 3306)

- **Flag : 0RPT**

11111111	flag	scop	reserved	Plen	Network prefix	Group ID
8 bits	4	4	8 bits	8	64 bits	32 bits

Flag : 0RPT

P=0 → Address not based on the unicast prefix

P=1 → Address based on the unicast prefix

If P=1 → T=1 → FF30::/12 prefix  
(T=1 because not allocated by IANA)

Reserved : 0

Plen: Prefix length

Network prefix

Example:

prefix 2001:660::/32 (RENATER)

address FF3E:20:2001:660:0:0:1234:abcd



# SSM addresses

- Are also RFC3306 addresses
- SSM addresses range: **FF3X::/32**
- Only addresses in FF3X::/96 should be used now. These are RFC3306 addresses with:
  - Plen = 0
  - Prefix = 0
- Example:
  - FF**3**x::1234:abcd /96
  - 1234:abcd being the Group ID



# Multicast addresses allocation

- « Manual » choice of multicast address and port
- Dynamic
  - Session Announcement Protocol, (SAP), ID
    - SDR implements SAP (not scalable for a global scope)
  - MADCAP, RFC 2730
    - Multicast Address Dynamic Client Allocation Protocol (too much complex, very few implementations and no deployment)
  - GLOP, RFC 2770
    - Useless as we have RFC 3306
- Multicast addresses derived from unicast prefixes (RFC 3306)
  - Any host can derive a multicast address from the network prefix where it is connected
  - Makes allocation easier
  - How to assign addresses to end user remains a problem





# IPv6 multicast

Multicast addressing

**MLDv1 & MLDv2**

PIM SM/SSM

Interdomain multicast





# Multicast Listener Discovery ( MLD )

RFC 2710 (MLD version 1)

RFC 3810 (MLD version 2)




# MLD


- Interaction protocol between
  - Multicast router on the link-local
  - Multicast hosts on the link-local
- Host can say: « I want to join group *FF0E::1234* and receive the related flow »
- MLD <-> IGMPv2 <-> ASM only
- MLDv2 <-> IGMPv3 <-> SSM + ASM
- MLD messages are sent in ICMPv6 packets



# MLD packet

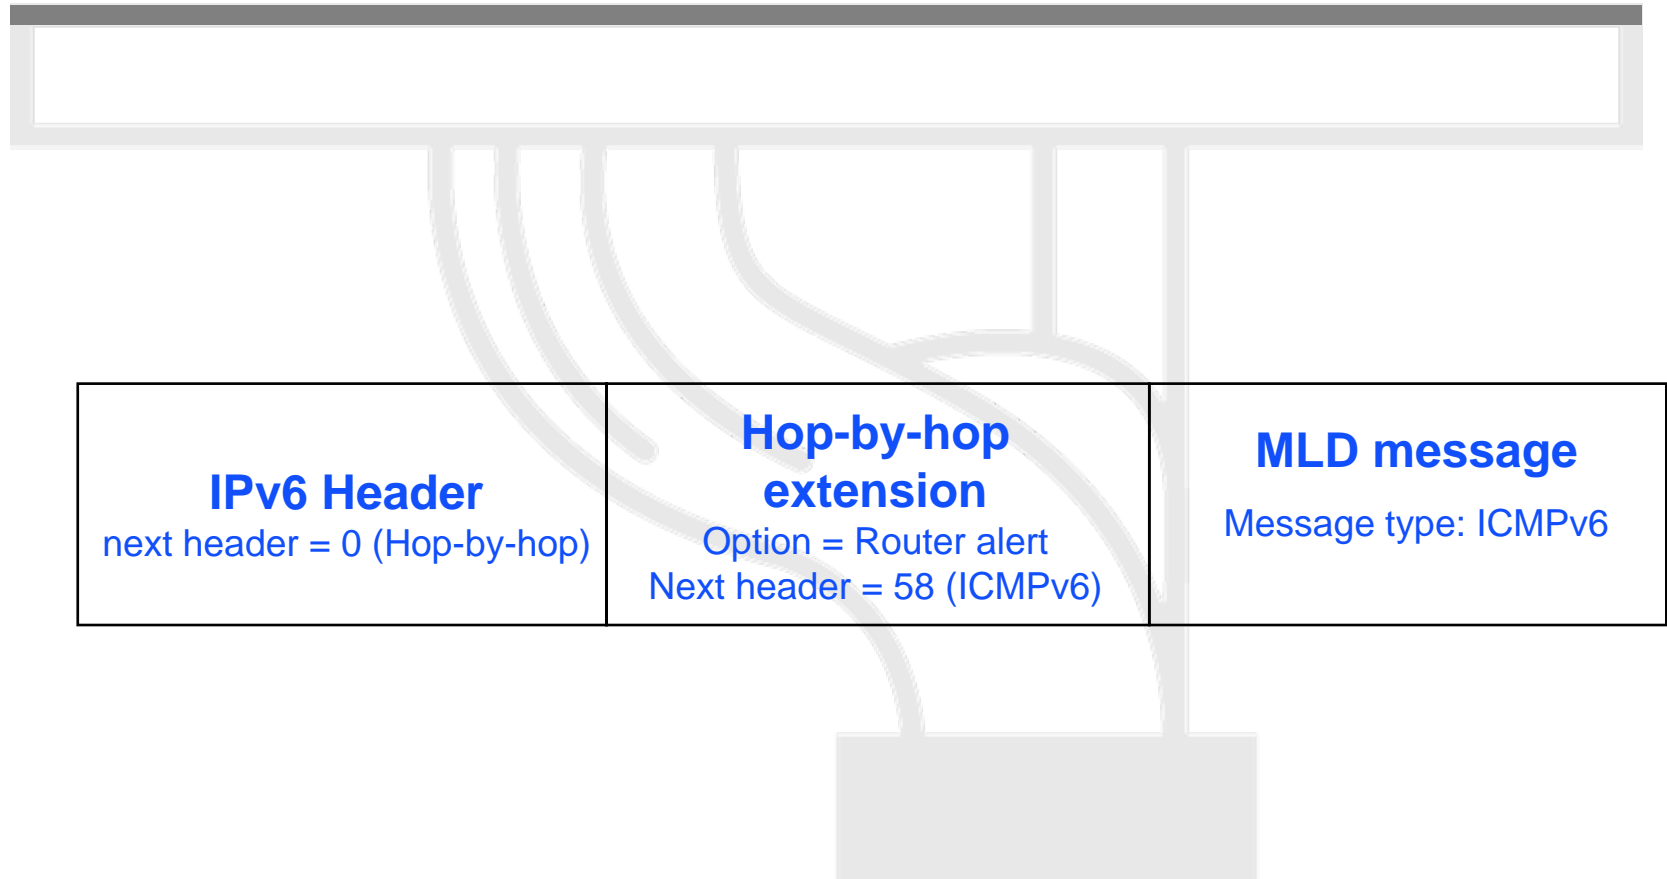

# MLDv1 message

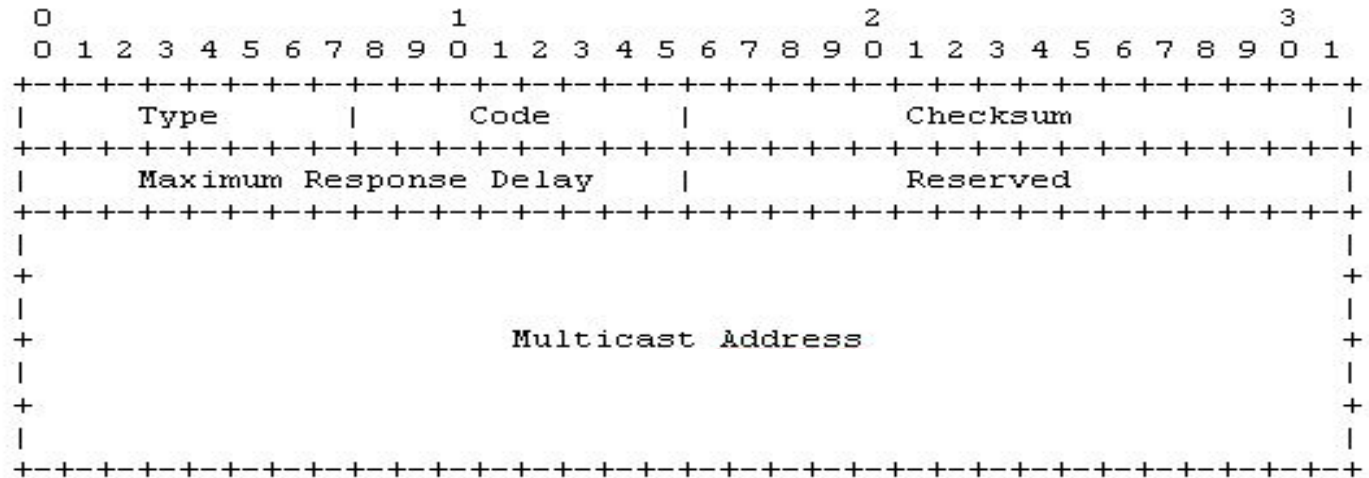


- **Type** : Messages types
  - General Query et Multicast-Address-Specific Query (130)
  - Multicast Listener Report (131)
  - Multicast Listener Done (132)
- **Code** : Set to 0 by sender and ignored then
- **Checksum** : for the complete packet (headers+MLD message)
- **Maximum Response Delay** : For query messages, time by which hosts must respond
- **Reserved** : Not used: set to 0 and ignored then
- **Multicast Address** : IPv6 multicast address or 0 according to the type of MLD message







# MLDv1 : Join a group

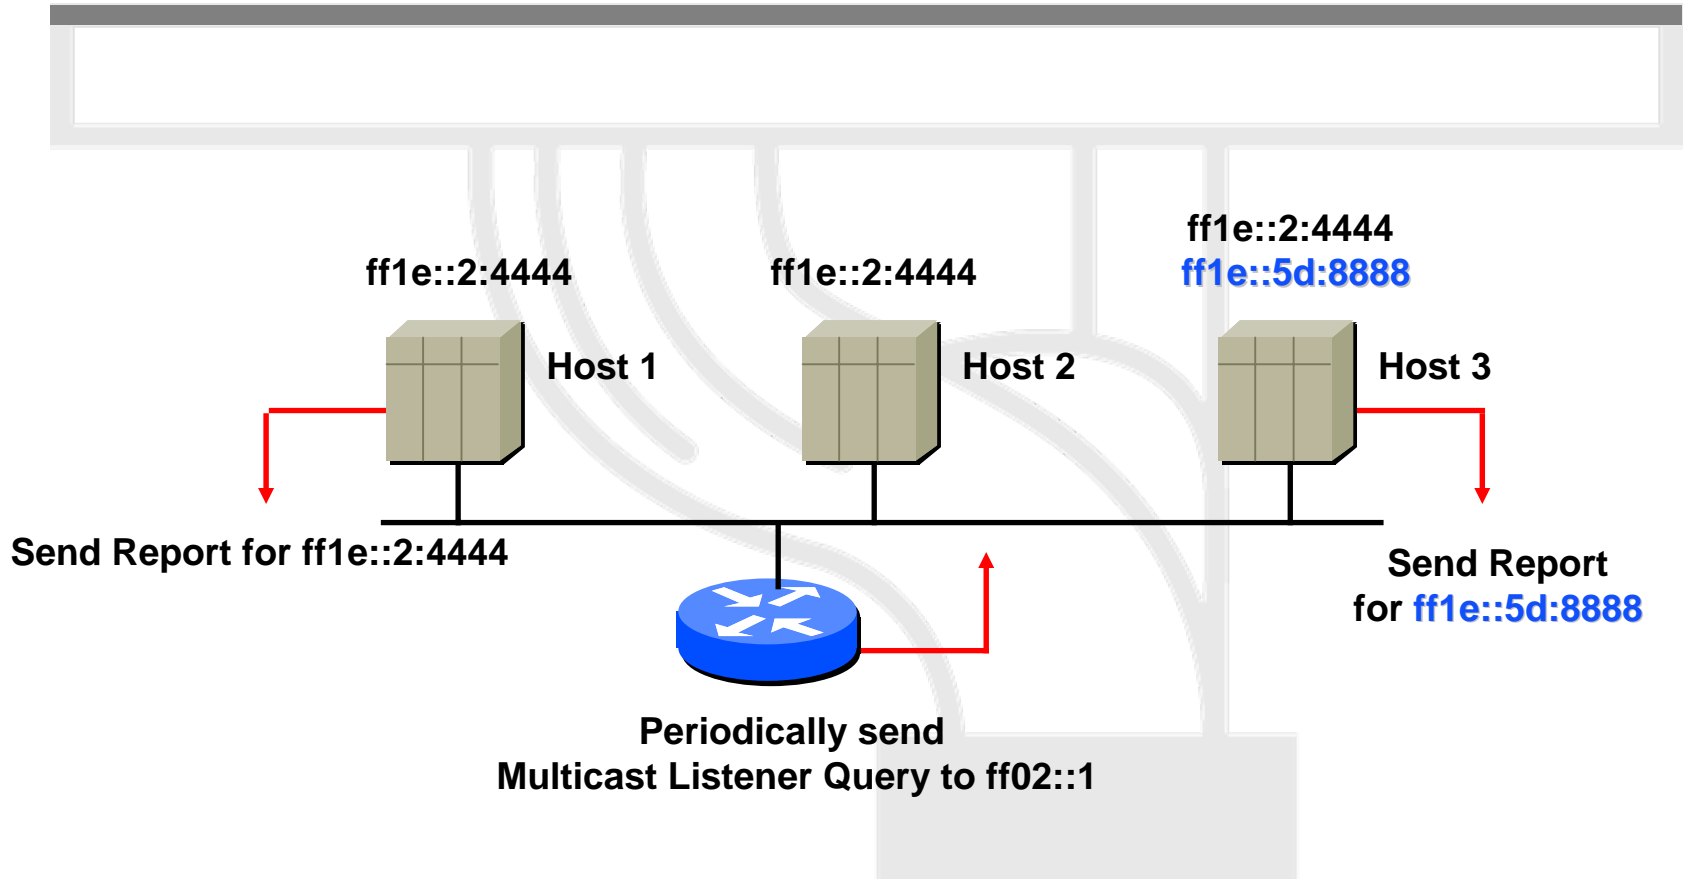

# MLDv1 : Leave a group

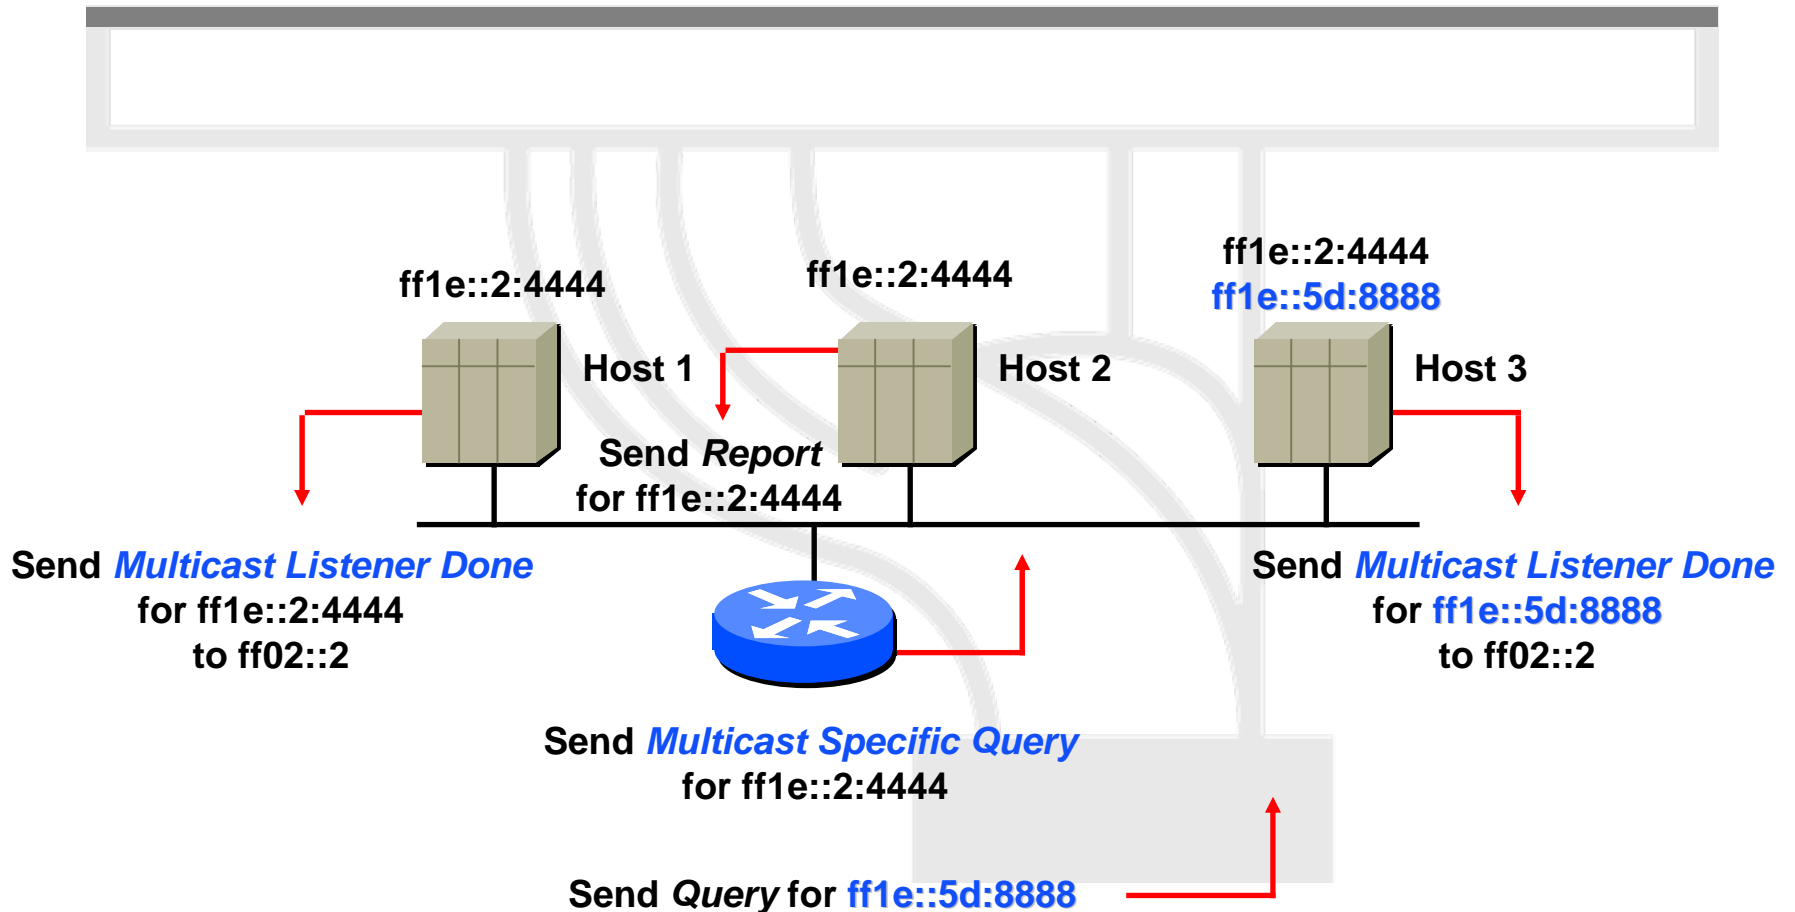

# MLDv1 : Leave a group

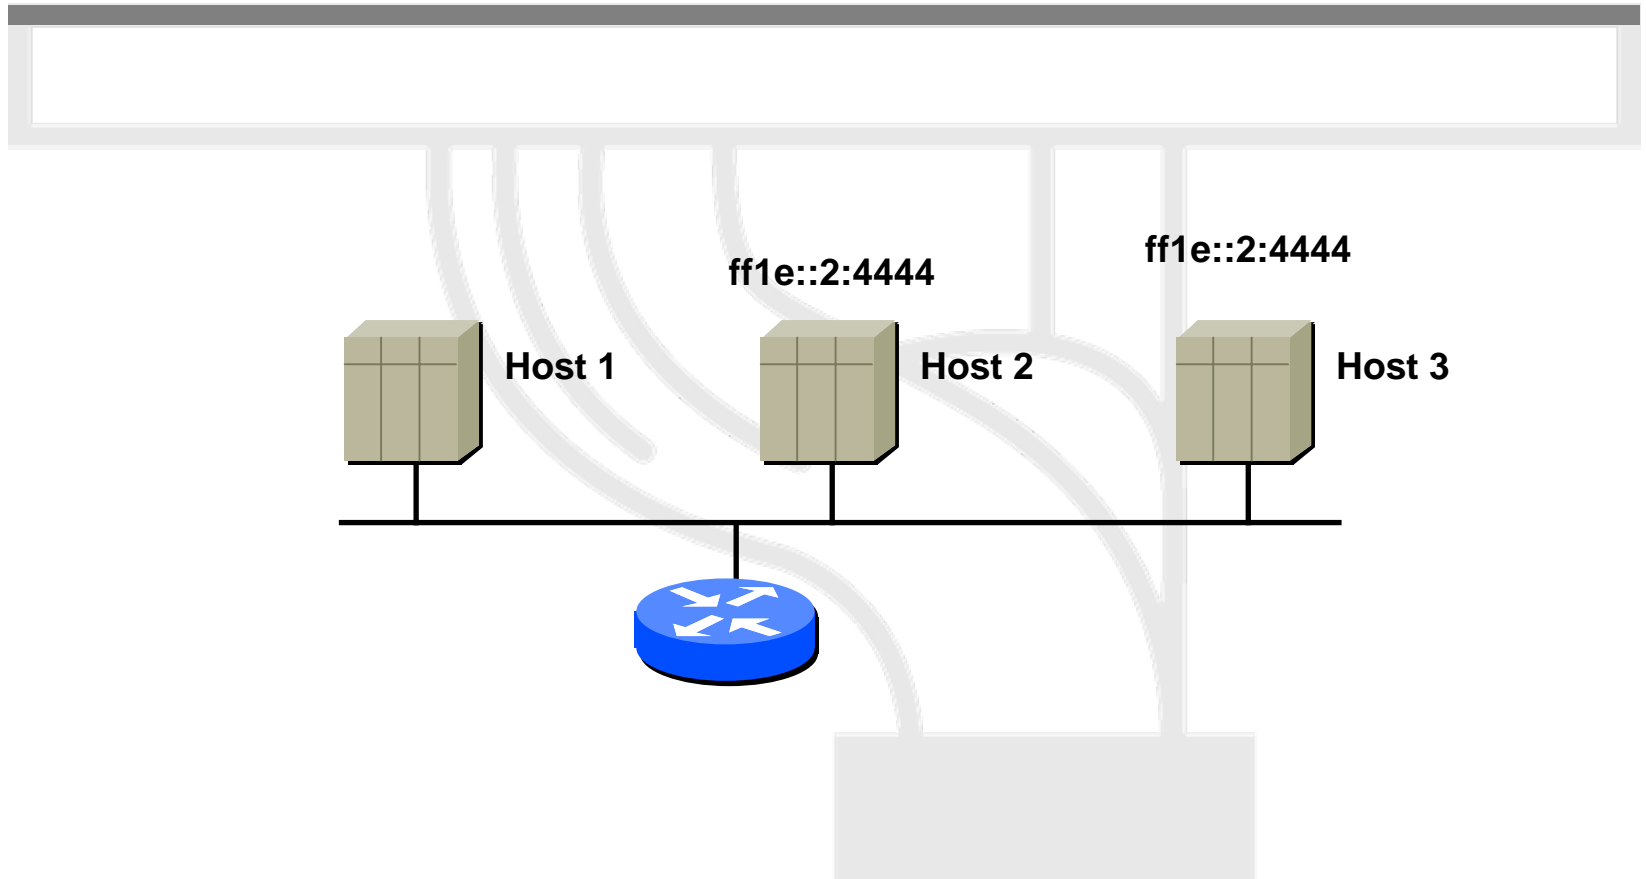

# MLDv2 (RFC 3810)

- Management of group **& sources**
  - INCLUDE : to receive packets from sources specified in the MLDv2 message
  - EXCLUDE : to receive packets from all sources except the ones sepecified in the MLDv2 message
- 2 types of messages
  - Multicast listener query messages
  - Multicast listener report messages
- Interoperable with MLDv1





# IPv6 multicast

Multicast addressing

MLDv1 & MLDv2

**PIM SM/SSM**

Interdomain multicast



# PIM SM/SSM

- Protocol Independent Multicast
- No difference with PIM for IPv4
  - Except PIM messages are sent with link-local IPv6 address
- Creates multicast trees between senders and receivers (Diffusion trees)
- Not a routing protocol
- Relies on other routing protocols (MBGP, static...)





# IPv6 multicast

Multicast addressing

MLDv1 & MLDv2


PIM SM/SSM

Interdomain multicast



# Interdomain multicast

- Not an SSM problem. Source specific trees created from senders to receivers accross domains
- ASM problem: was solved in the IPv4 world with MSDP (Multicast Source Discovery Protocol)

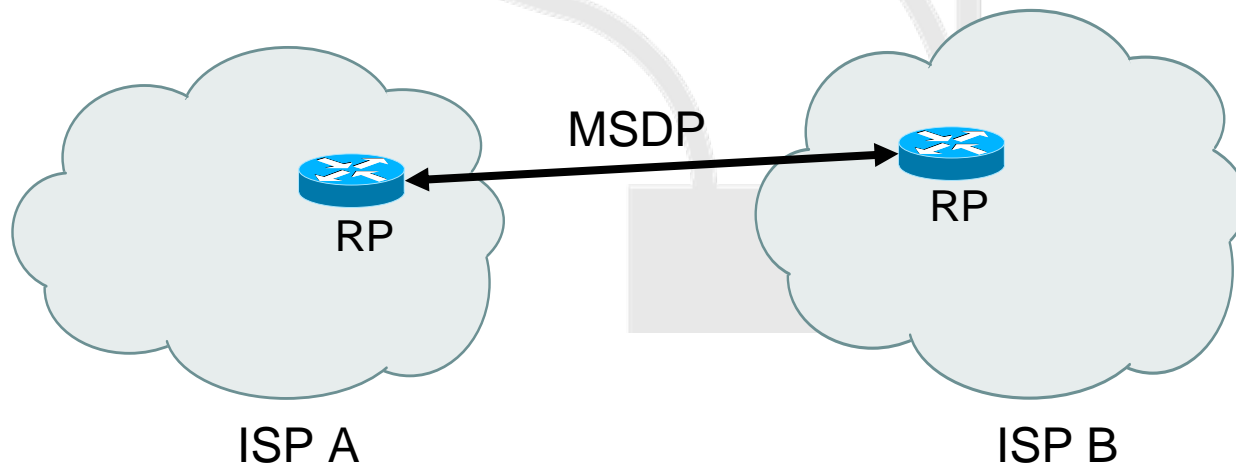



# Interdomain multicast

- No one wants MSDP for IPv6, not manageable/scalable
- SSM IETF lobby
  - Some SSM apps already developed
- How to solve N -> M multicast ?
  - Application / Middleware ?
  - Not there yet (work ongoing)
- Embedded-RP – RFC 3956
  - One unique PIM domain with shared RPs
  - Embedded is a solution for group-to-RP mapping
  - Requires support in all PIM routers



# Embedded-RP

- Flag : 0**R**PT

11111111	flag	scop	res	<b>rpad</b>	<b>Plen</b>	<b>Network prefix</b>	<b>Group ID</b>
8 bits	4	4	4	4	8	64 bits	32 bits

Flag : 0**R**PT

**R**=1 → Embedded-RP address

If **R**=1 → **P**=1 → **T**=1

FF**7**x::**16** addresses

Res : 0

**Rpad** : last 4 bits of the RP address

**Plen**: Prefix length


**Network prefix**

E.g. RP address 2001:660:3001:104::**8**

Multicast address FF**7**E:0**820**:2001:660:3001:104:**1234**:abcd



# Embedded RP

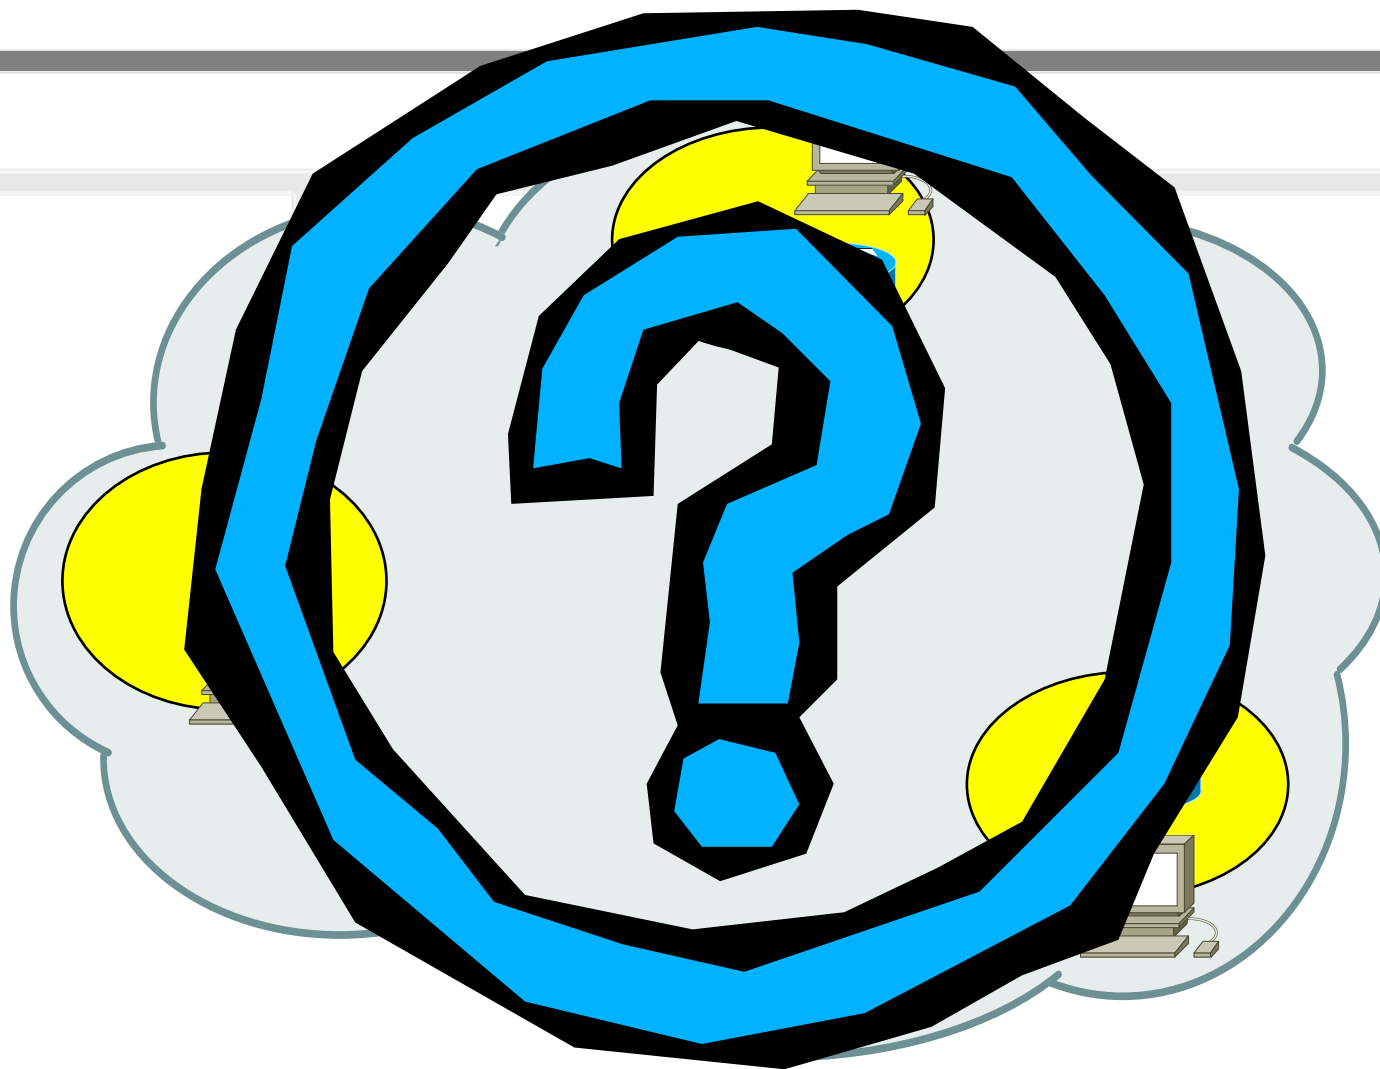

*Where and when ?*

IPv6DISSemination and Exploitation